

Composite Decking Range












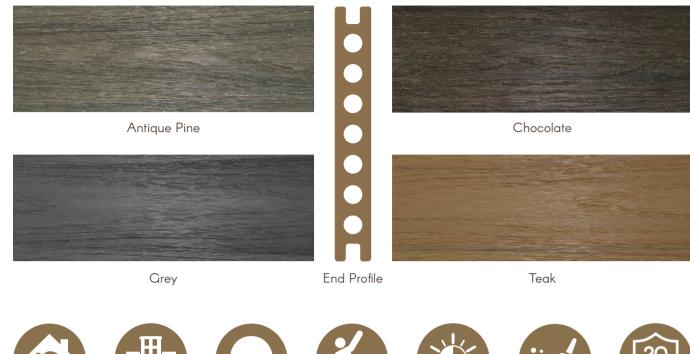








UV Resistant





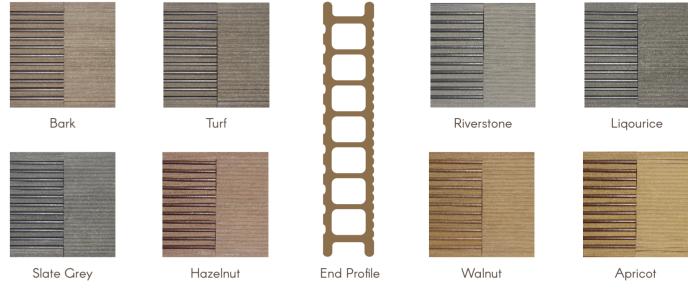

















UV Resistant









Product Description

Commercial

Fusion Composite Decking boards have an outer shell of polymer that completely encapsulates the boards high density polyetheylene plastic and wood fibre inner core, it provides an impermeable layer of protection against, fading, staining, mould, mildew and scratching.

This truly is the next generation of composite Decking board with 360° protection against the elements, the product also boasts all of the normal benefits of composite decking over traditional wood.

Technical Specification

20 Year

Easy Clean

Length - 2.2m

Width - 145mm

Thickness - 20mm

Maximum Joist Span – 400mm

UV Resistant

AB Composite Decking Boards are made from natural wood fibres and recycled plastic. The finished product showcases a unique profile which is durable, easy to work with and has minimal expansion or contraction with the weather.

Product Description

The boards are impervious to frost, and are self-coloured throughout so chips will not show. Available with either a hollow or solid core, making it suitable for both domestic and commercial applications.

Mould

Technical Specification

Length - 2.2m

Width - 145mm

Thickness - 20mm

Maximum Joist Span – 400mm

Product Description

AB Composite Decking Tiles are a 100% eco-friendly composite deck tile comprised of natural wood grains, with an interlocking base for a quick and easy installation. The decking tiles will not bend, warp, split, or crack making them virtually maintenance free.

Mould

The tiles innovative interlocking system was designed to be used by anyone, from DIY beginners to experienced builders looking for a gorgeous, easy to install, low maintenance deck.

Technical Specification

Length - 300mm

Width - 300mm

Thickness - 20mm

Pack (10) Coverage - 0.9m²

Product Description

Twinson Composite Decking boards have a wood brushed finish on both visible faces, with anti-slip grooves for safety and comfort. The boards are double-walled and built to last. They are joined invisibly with system-specific assembly clips.

The clips produce a fixed gap of 4 mm between the boards. To add that finishing touch, the system is available with a skirting-board which is 78 mm high and 10 mm thick.


Length - 4m or 6m

Width - 140mm

Thickness - 28mm

Maximum Joist Span - 500mm

Technical Specification

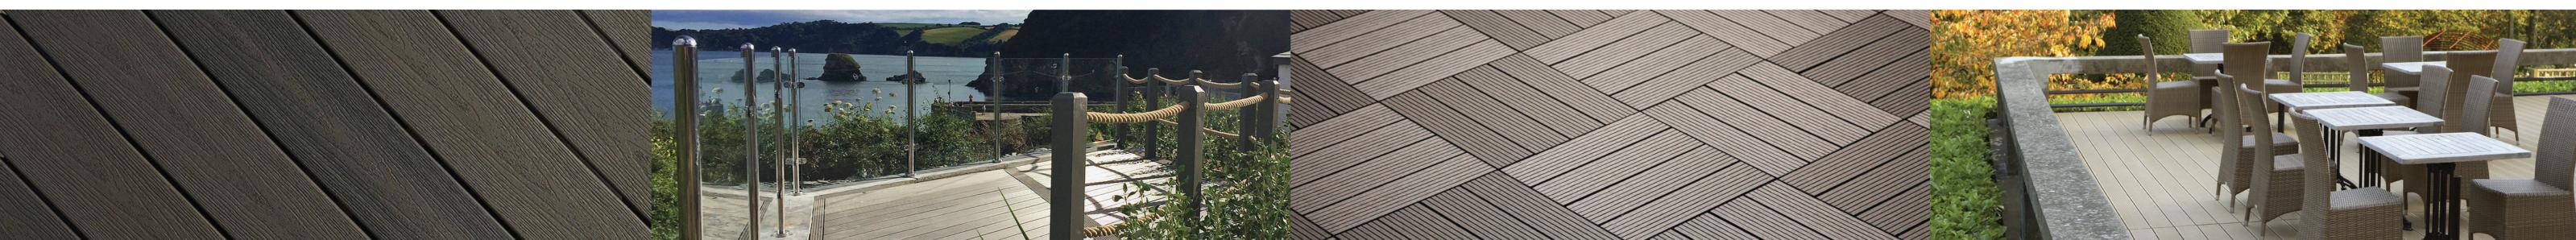



Ryno support systems resolutely uphold everything Ryno stands for. From large scale development schemes to small domestic gardens, Ryno Support products are chosen because of their simple yet effective designs, ease of installation, and most importantly the unsurpassed dedication to customer service.

The RynoDeckSupport aluminium substructure system is the ultimate decking support solution. Its simple and sturdy design ensures rapid installation regardless of the complexity of the project. It has been designed to support any conventional decking.



Contact Details

AB Building Products Ltd Units 4-5 Regents Court Walworth Ind. Estate Andover Hampshire SP10 5NX

Email: orders@abbuildingproducts.co.uk Tel: 01264 359 984 www.abbuildingproducts.co.uk







